

04-27-00

A

 04/26/00  
 36777 U.S. PTO
Please type a plus sign (+) inside this box → ☐
 PTO/SB/05 (2/98)  
 Approved for use through 09/30/2000. OMB 0651-0032  
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	OPT-11
	First Inventor or Application Identifier	Robinson, Douglas L.
	Title	Real or Virtual Imaging System with Reduced Gho
	Express Mail Label No.	EL304700655US

<b>APPLICATION ELEMENTS</b> See MPEP chapter 600 concerning utility patent application contents.	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	6. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages <b>15</b> ] (preferred arrangement set forth below) - Descriptive title of the invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the invention - Brief Summary of the invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure	7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets <b>11</b> ] 4. Oath or Declaration [Total Pages <input ]<br="" type="checkbox"/> a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below] i. <input type="checkbox"/> <b>DELETION OF INVENTOR(S)</b> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	<b>ACCOMPANYING APPLICATION PARTS</b> 8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 9. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney 10. <input type="checkbox"/> English Translation Document (if applicable) 11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 12. <input type="checkbox"/> Preliminary Amendment 13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) * Small Entity <input type="checkbox"/> Statement filed in prior application, Status still proper and desired 14. <input type="checkbox"/> Statement(s) (PTO/SB/09-12) 15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 16. <input type="checkbox"/> Other: .....
5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	* NOTE FOR ITEMS 1 & 14: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_ / \_\_\_\_\_  
 Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_
**18. CORRESPONDENCE ADDRESS**

<input checked="" type="checkbox"/> Customer Number or Bar Code Label	<b>020808</b>	or <input type="checkbox"/> Correspondence address below
(Insert Customer No. or Attach bar code label here)		
Name		
Address		
City	State	Zip Code
Country	Telephone	Fax

Name (Print/Type)	Christopher A. Michaels	Registration No. (Attorney/Agent)	34,390
Signature		Date	4/26/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231 DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

 04/26/00  
 09/557859  
 36777 U.S. PTO

# REAL OR VIRTUAL IMAGING SYSTEM WITH REDUCED GHOST IMAGING

## REFERENCE TO PROVISIONAL APPLICATION

This application claims an invention which was disclosed in Provisional Application Number 60/131,320, filed April 27, 1999, entitled "NO GHOST FILTER". The benefit under  
5 35 USC § 119(e) of the United States provisional application is hereby claimed, and the  
aforementioned application is hereby incorporated herein by reference.

## FIELD OF THE INVENTION

The invention pertains to the field of virtual or real image display systems. More particularly, the invention pertains to a real image display system with a decreased ghost  
10 imaging effect.

## BACKGROUND OF THE INVENTION

It is desirable in modern imaging display systems to provide images having good contrast that appear sharp and undistorted to the viewer. One of the major problems in presenting a clear image is that real, virtual, or infinity imaging systems generally employ  
15 curved mirrors and exhibit problems with secondary ghosting, that is, forming an additional image of the projected light source image at the point of observation. This occurs when outside light enters an imaging system and is projected as an additional ghost image near the focal point at which the primary image is projected and viewed.

Ghost image formation in a prior art imaging system 10 is illustrated in Figure 1. A  
20 primary image 12, *e.g.*, a target or CRT, is projected along a primary light path (PP) that includes a beamsplitter 14 and a curved mirror 16. A primary image 18 is formed as shown at a focal point  $FP_R$  outside the system. Outside light 20 entering system 10 traverses a secondary light path (SP) inside the imaging system, and due to a different angle of incidence is reflected at a different angle from mirror 16, focusing a ghost image 22 at a focal point  $FP_G$

non-coincidental with  $FP_R$ . The result is poorer contrast and resolution in the primary image 18.

Another prior art approach is to include an absorptive beamsplitter for absorbing outside light entering the optical system. This technique is effective in decreasing the brightness of the ghost image, but it does not eliminate the ghost image entirely or even decrease it significantly, and the ghost image remains visible. A similar approach is to include high efficiency, anti-reflective coatings on optical system components, for example on the lens elements. This technique is again of limited effectiveness, and while decreasing ghost imaging, does not do so to a significant degree.

Another prior art approach as found in US Pat. No. 5,585,946 and shown in Figs. 2 and 2a is an imaging system 10a that includes a linear polarizer 30 and a quarter wave plate 32, positioned together as a window 34 into the system, a mirror 36, and a beamsplitter 38 inclined about 45 degrees, positioned in an on-axis configuration as shown. The quarter wave plate is an optical component producing a 45 degree polarization shift, while circularly polarizing unpolarized light. Fig. 3a shows the transmission of the primary imaging light within the imaging system. Figs. 3b and 3c show the transmission of outside light within the system as a percentage of the initial light source intensity transmitted by each indicated structure. The transmission of primary imaging light exiting window 34 is about 10.62 percent, for structures having characteristics similar or identical to those described below for the preferred embodiments of the present invention. As shown in Figs. 3b and 3c, unpolarized outside light entering the system through window 34 is polarized by linear polarizer 30, which is shown as horizontal polarization for purposes of discussion, and upon traversing quarter wave plate 32 becomes right circular. The light then passes through beamsplitter 38 (a 50 percent transmitting 50 percent reflecting-type, for purposes of discussion) twice, once before striking the mirror and again after reflection from the mirror, in the process transitioning twice between right and left-circular polarization. The configuration is effective in blocking all but 5.313 percent of the outside light that entered imaging system 10a. In the process, however, beamsplitter 38 phase-shifts the circularly polarized light, introducing an elliptical component into the light that prevents it from being entirely blocked

by polarizer 30, producing a viewable ghost image outside window 34 that degrades the optical resolution and contrast of primary image 18.

11/11/2019 10:11:11 AM

## SUMMARY OF THE INVENTION

Briefly stated, a virtual or real image display system includes a primary image source for projecting a primary image from the start of a primary light path to an end of the primary light path at which the primary image is viewable, a mirror, a first beamsplitter positioned in the primary light path between the primary image source and the mirror, circular polarizing means for circularly polarizing a light beam positioned in the primary light path between the first beamsplitter and the mirror, and linear polarizing means for linearly polarizing light positioned in the primary light path between the end of the primary light path at which the image is viewable and the first beamsplitter, whereby outside light entering the system is substantially blocked before exiting the system, to thereby substantially eliminate ghost image formation caused by outside light sources.

According to an embodiment of the invention, a virtual or real image display system includes a primary image source for projecting a primary image from the start of a primary light path to an end of the primary light path at which the primary image is viewable, a mirror, a first beamsplitter positioned in the primary light path between the primary image source and the mirror, a quarter wave plate positioned in the primary light path between the first beamsplitter and the mirror, and a linear polarizer positioned in the primary light path between the end of the primary light path at which the image is viewable and the first beamsplitter, whereby outside light entering the system is substantially blocked before exiting the system, to thereby substantially eliminate ghost image formation caused by outside light sources.

According to an embodiment of the invention, a method of decreasing ghost images in a real or virtual imaging system includes the steps of projecting a primary image outside the imaging system, passing outside unpolarized light entering the imaging system through a linear polarizer to produce a first linear polarized light, beam-splitting the first linear polarized light, passing the beam-split, first linear polarized light through a quarter wave plate to produce a first circular polarized light, reflecting the first circular polarized light off a concave mirror to produce a second circular polarized light having a rotation opposite that of

the first circular polarized light, passing the second circular polarized light through the quarter wave plate to produce a second linear polarized light having an orientation opposite that of the first linear polarized light, beam-splitting the second linear polarized light, and blocking the beam-split second linear polarized light with the linear polarizer, thereby substantially eliminating ghost image formation in the imaging system due to outside light sources.

The imaging system positions the quarter wave plate between the beamsplitter and the mirror. This allows outside light to remain circularly polarized between the quarter wave plate and the mirror and avoids introducing an elliptical component to the outside light. The quarter wave plate converts the light back to linear polarized but now with the opposite orientation of the linear polarizer. The light impinges on the front window, and the linear polarizer effectively blocks substantially all the light, substantially eliminating ghost image formation from outside light sources.

Another advantage of the imaging system achieved by placement of the quarter wave plate behind the beamsplitter is, with the beamsplitter inclined, preferably about 45 degrees, outside light entering the system and linear polarized by the front window is more effectively reflected upward and out of the system by the inclined beamsplitter than are other orientations of light, e.g. unpolarized, circularly polarized, or elliptically polarized light. This greatly decreases the outside light intensity within the imaging system and further contributes to decreased ghost image formation.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a prior art imaging system.

Figs. 2 and 2a show a prior art imaging system.

Figs. 3a, 3b, and 3c show light transmission characteristics of the prior art system of Figs. 2 and 2a.

Fig. 4 shows an on-axis configuration of an image display system according to the invention.

Figs. 5a, 5b, and 5c show light transmission characteristics of the system of Fig. 4 according to the invention.

Fig. 6 shows an on-axis configuration of an image display system according to the invention.

Figs. 7a, 7b, and 7c show light transmission characteristics of the system of Fig. 6 according to the invention.

Fig 8 shows an of-axis configuration of an image display system according to the invention.

Figs. 9a, 9b, and 9c show light transmission characteristics of the system of Fig. 8 according to the invention.

Fig. 10 shows an off-axis configuration of an image system according to the invention.

Figs. 11a, 11b, and 11c show light transmission characteristics of the system of Fig. 10 according to the invention.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

The term "on-axis" as used herein is also intended to include imaging systems having a near on-axis configuration of optical components with respect to the light path within the imaging system, as should be readily apparent to one of ordinary skill in the art.

Referring to FIGS. 4 and 5a, a virtual or real image on-axis display system 100 includes a projected primary image 102, such as that produced by a cathode ray tube or an illuminated object, projected as a monochrome, black and white, or color primary light beam 103. The source object 102 is anything that reflects, transmits or emits light. Light beam 103 partially passes through and partially reflects from inclined beamsplitter 104, in a 50:50 percentage ratio as shown for a 50 percent transmitting/50 percent reflecting (50T/50R) type beamsplitter 104. Optionally, the ratio may be other than 50T/50R. Beamsplitter 104 includes a clear substrate 106, a beamsplitter coating 108 or any partially reflective coating, and an optional anti-reflective coating 110.

A reflected, unpolarized light beam 112 passes through a quarter wave plate 114, which has no effect upon light beam 112 because it is unpolarized, and then reflects from concave mirror 116. Quarter wave plate 114 includes a quarter wave layer 118 and preferably a clear substrate layer 120 on each surface of layer 118. Each layer 120 is preferably coated with an anti-reflective layer 122. Mirror 116, which can be spherical or aspherical, includes a substrate 124, a mirror coating 126, and a protective overcoat 128. After striking mirror 116, primary light beam 103 starts converging toward a focal point determined by the radius of curvature of mirror 116. Light beam 103 then passes through each of plate 114 and beamsplitter 104 a second time, the transmission being 50 percent through beamsplitter 104, and then through a linear polarizing window 130 that polarizes light beam 103 at about 10.6 percent of the original intensity. The light is shown as horizontally polarized. Window 130 includes a clear substrate 132, a linear polarizer 134, and an optional anti-reflective coating 136. Optionally, an anti-reflective coating is also applied to surface 134. Primary light beam 103 then converges to form an image 138. The precise location of image 138 depends on the focal point or radius of mirror 116. FIG. 5a shows the percent transmittance of light beam 103 as it passes through optical system 100.

Referring to FIGS. 5b and 5c, transmission of outside light within imaging system 100 shows an unpolarized outside light beam 140 entering system 100 through linear polarizing window 130 and acquiring a horizontal polarization for purposes of discussion. Light beam 140 then passes through beamsplitter 104, retaining its horizontal polarization, and then through quarter wave plate 114 where it becomes right circular ("RC"). Light beam 140 then reflects from mirror 116, becoming left circular ("LC"), and becomes vertically polarized ("VP") after passing through quarter wave plate 114. Light beam 140 passes again through beamsplitter 104 after which it is substantially blocked by linear polarizer 130, preventing the outside light from exiting system 100 and thereby substantially eliminating this source of ghost image formation.

Referring to FIG. 6, an on-axis image display system 200 is configured similarly to image display system 100a with the major difference being that quarter wave layer 118 is positioned on beamsplitter coating 108 to form a combined beamsplitter/quarter wave plate



structure 141. As shown, layer 118 is positioned on a surface 143 of beamsplitter coating 108 facing mirror 116. FIG. 7a shows the transmission of imaging light through system 200, which despite some variations within the light path achieves the same or about the same percentage transmission. FIGS. 7b and 7c show the analysis of outside light entering system 200, again showing that aside from some variations along the light path attributable to the different relative positioning of the optical components and in particular structure 202, system 200 like system 100 is effective in substantially blocking outside light before exiting window 130 and substantially eliminating this source of ghost imaging.

Referring to FIG. 8, an on-axis image display system 300 is configured similarly to image display systems 100 and 200 except that it is an on-axis system, that is, optical components 104, 114, and 116 are positioned along a central axis that is normal or approximately normal to an axis on which window 130 is positioned and along which light exits window 130 and image 138 is projected. As shown in FIG. 9a, imaging light converging to form primary image 138 has substantially the same intensity level percentage-wise as in systems 100 and 200. FIGS. 9b and 9c show that outside light entering system 300 is as effectively blocked as with systems 100 and 200, substantially eliminating ghost imaging attributable to outside light sources.

Referring to FIG. 10, an off-axis image display system 400 has a similar configuration to that of image display system 300, with the exception that as in system 200 beamsplitter 108 and quarter wave plate 118 are combined into a single structure 402. Structure 402, however, differs from structure 141 of system 200 in that structure 402 includes a quarter wave layer 118 positioned on a side 406 of structure 402, which faces the mirror 116 and the window 130. This configuration is consistent with systems 100, 200 and 300 in the sense that quarter wave layer 118 is thus positioned between beamsplitter coating 108 and mirror 116. As shown in FIG. 11a, imaging light converging to form primary image 138 has substantially the same intensity level percentage-wise as in systems 100, 200, and 300. FIGS. 11b and 11c show that outside light entering system 400 is again effectively blocked, substantially eliminating ghost imaging attributable to outside light sources.

Imaging systems 100, 200, 300 and 400 optionally include a second beamsplitter 142 (shown in phantom), preferably a 50T/50R beamsplitter, inclined preferably about 45 degrees with respect to a monochrome, black and white, or color secondary light beam 144 projecting a secondary image 146 (shown in phantom), producing a viewable secondary image 148 at or  
5 near primary image 138. This additional beamsplitter 142 allows a second image 148 to be projected at a different plane than image 102.

Imaging systems 100, 200, 300 and 400 optionally include one or more additional monitors 150 for projecting one or more additional images, such as, for example, one or more background images. The background image will appear as a virtual image located within the  
10 system. The advantage of a background image is that it allows a second plane of data or images to be presented behind the primary image.

### Comparison

Without being bound by theory, it is believed that in prior art systems utilizing a configuration as in or similar to that of the Comparison test, the beamsplitter's off-axis angle  
15 of incidence with respect to the image light source and optical transmission path produces an elliptically-polarized component to circularly-polarized light incident on the beamsplitter that is not fully blocked by the front polarizer and that results in ghost image formation. It is standard knowledge within the optical industry that circular polarization becomes elliptical when passing through a substrate that has an angle of incidence other than normal.

20 In contrast, the present invention, by placing the quarter wave plate behind the beamsplitter with respect to the mirror, does not circularly polarize the outside light until after it initially passes through or reflects off the beamsplitter, after which the quarter wave plate introduces a circular polarization component to the light, and then removes the circular polarization component during the outside light's return path and before it again passes  
25 through or reflects from the beamsplitter, thereby substantially decreasing the elliptically polarized component and substantially decreasing ghost image formation.

The placement of quarter wave plate 114/118 between beamsplitter 104/118 and mirror 116 avoids the undesirable introduction of an elliptical phase shift into the outside light source light beam 112 as it traverses the light path by passing it through quarter wave plate 114/118. As circular polarized light passes through a glass substrate at an angle of incidence of other than normal, such as 45 degrees, the circular beam strikes the substrate at different positions within its circular path and the speed of the light is slowed as it passes through the substrate. The resulting circular polarization is distorted as it exits the substrate and becomes elliptically shaped. After reflecting off the curved mirror surface, the left elliptical polarization becomes right elliptical and does not return to pure circular polarization as it passes back through the beamsplitter substrate on its return path. In the No-Ghost configuration, the polarization is linear until after the beam passes through the inclined beamsplitter substrate, and therefore the angle of incidence will not affect the polarization. By circularly polarizing the light after the beam passes through the beamsplitter, the elliptical condition will never occur.

Accordingly, it is to be understood that the embodiments of the invention herein described are merely illustrative of the application of the principles of the invention. Reference herein to details of the illustrated embodiments are not intended to limit the scope of the claims, which themselves recite those features regarded as essential to the invention.

What is claimed is:

- 1 1. A virtual or real image display system, comprising:
  - 2 a) a primary image source for projecting a primary image from the start of a
  - 3 primary light path to an end of the primary light path at which the
  - 4 primary image is viewable;
  - 5 b) a mirror;
  - 6 c) a first beamsplitter positioned in the primary light path between the primary
  - 7 image source and the mirror;
  - 8 d) circular polarizing means for circularly polarizing a light beam positioned in
  - 9 the primary light path between the first beamsplitter and the mirror; and
  - 10 e) linear polarizing means for linearly polarizing light positioned in the
  - 11 primary light path between the end of the primary light path at which
  - 12 the image is viewable and the first beamsplitter,
  - 13 whereby outside light entering the system is substantially blocked before
  - 14 exiting the system to thereby substantially eliminate ghost image
  - 15 formation caused by outside light sources.
- 1 2. An image display system as in claim 1, wherein the circular polarizing means is a quarter
- 2 wave plate.
- 1 3. An image display system as in claim 1, wherein the circular polarizing means is a quarter
- 2 wave plate that includes a first surface, a second surface, and a clear substrate layer on
- 3 each of said first and second surfaces.
- 1 4. An image display system as in claim 3, wherein each of said clear substrate layers further
- 2 includes an anti-reflective coating thereon.

1 5. An image display system as in claim 1, wherein the mirror is a spherical concave mirror.

1 6. An image display system as in claim 1, wherein the mirror is an aspherical concave mirror.

1 7. An image display system as in claim 1, further comprising background projecting means  
2 for projecting a background image viewable with the primary image.

1 8. An image display system as in claim 1, further comprising a secondary image source and a  
2 second beamsplitter positioned between the secondary image source and the primary  
3 light path for projecting the secondary image viewable with the primary image.

1 9. An image display system as in claim 1, wherein the first beamsplitter is positioned at about  
2 a 45 degree angle relative to the primary light path.

1 10. An image display system as in claim 1, wherein the system is an on-axis system.

1 11. A virtual or real image display system, comprising:

2 a) a primary image source for projecting a primary image from the start of a  
3 primary light path to an end of the primary light path at which the  
4 primary image is viewable;

5 b) a mirror;

6 c) a first beamsplitter positioned in the primary light path between the primary  
7 image source and the mirror;

8 d) a quarter wave plate positioned in the primary light path between the first  
9 beamsplitter and the mirror; and

10 e) a linear polarizer positioned in the primary light path between the end of the  
11 primary light path at which the image is viewable and the first  
12 beamsplitter,

whereby outside light entering the system is substantially blocked before exiting the system to thereby substantially eliminate ghost image formation caused by outside light sources.

12. An image display system as in claim 11, wherein the quarter wave plate includes a first surface, a second surface, and a clear substrate layer on each of said first and second surfaces.

13. An image display system as in claim 12, wherein each of said clear substrate layers further includes an anti-reflective coating thereon.

14. An image display system as in claim 11, wherein the mirror is a spherical concave mirror.

15. An image display system as in claim 11, wherein the mirror is an aspherical concave mirror.

16. An image display system as in claim 11, further comprising background projecting means for projecting a background image viewable with the primary image.

17. An image display system as in claim 11, further comprising a secondary image source and a second beamsplitter positioned between the secondary image source and the primary light path for projecting the secondary image viewable with the primary image.

18. An image display system as in claim 11, wherein the first beamsplitter is positioned at about a 45 degree angle relative to the primary light path.

19. An image display system as in claim 11, wherein the system is an on-axis system.

20. A method of decreasing ghost images in a real or virtual imaging system, comprising the steps of:

a) projecting a primary image outside the imaging system;

- 5 b) passing outside unpolarized light entering the imaging system through a  
6 linear polarizer to produce a first linear polarized light;
- 7 c) beam-splitting the first linear polarized light;
- 8 d) passing the beam-split, first linear polarized light through a quarter wave  
9 plate to produce a first circular polarized light;
- 10 e) reflecting the first circular polarized light off a concave mirror to produce a  
11 second circular polarized light having a rotation opposite that of the  
12 first circular polarized light;
- 13 f) passing the second circular polarized light through the quarter wave plate to  
14 produce a second linear polarized light having an orientation opposite  
15 that of the first linear polarized light;
- 16 g) beam-splitting the second linear polarized light; and
- 17 h) blocking the beam-split, second linear polarized light with the linear  
18 polarizer,
- 19 thereby substantially eliminating ghost image formation in the imaging system  
20 due to outside light sources.

1 21. A method as in claim 20, wherein the beamsplitter is inclined at a 45 degree angle  
2 relative to the light path.

1 22. A method as in claim 21, further comprising projecting a secondary image viewable with  
2 the primary image.


1 23. A method as in claim 21, further comprising superimposing a background image onto the  
2 primary image.

**ABSTRACT**


A virtual or real image display system includes a primary image source for projecting a primary image from the start of a primary light path to an end of the primary light path at which the primary image is viewable, a mirror, a beamsplitter, a quarter wave plate, and a linear polarizer. The beamsplitter is positioned in the primary light path between the primary image source and the mirror. The quarter wave plate is positioned in the primary light path between the first beamsplitter and the mirror. The linear polarizer is positioned at or near a front window placed in the primary light path between the end of the primary light path at which the image is viewable and the first beamsplitter. Positioning the quarter wave plate between the beamsplitter and the mirror allows outside light to remain circularly polarized between the quarter wave plate and the mirror, avoiding the introduction of an elliptical component to the outside light before the light impinges on the front window. The linear polarizer then effectively blocks substantially all the outside light, substantially eliminating ghost image formation from the outside light source. Positioning the beamsplitter at an incline provides a further advantage whereby a high percentage of outside light entering the system and linear polarized by the front window is reflected upward and out of the system by the beamsplitter. The outside light intensity within the imaging system is greatly decreased, further contributing to decreased ghost image formation.




**FIGURE 1**  
(Prior Art)

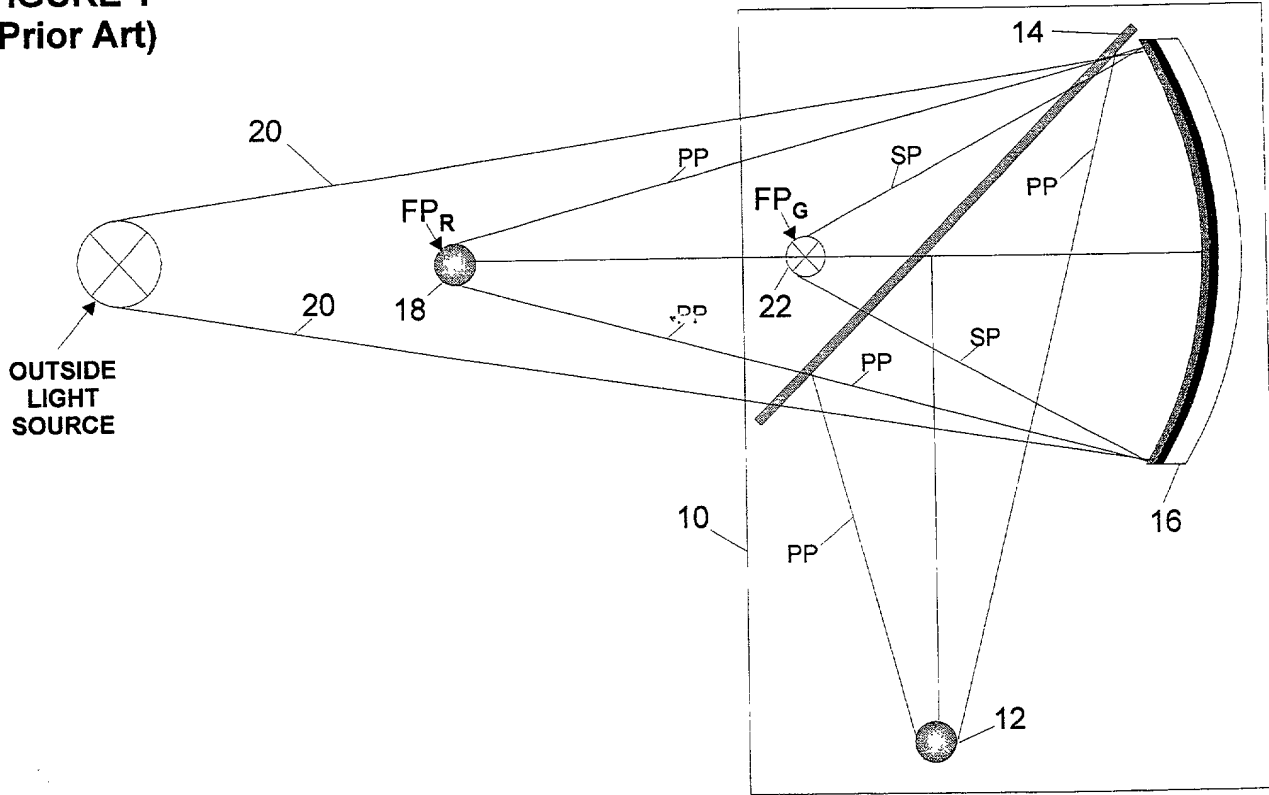


**FIGURE 2**  
(Prior Art)

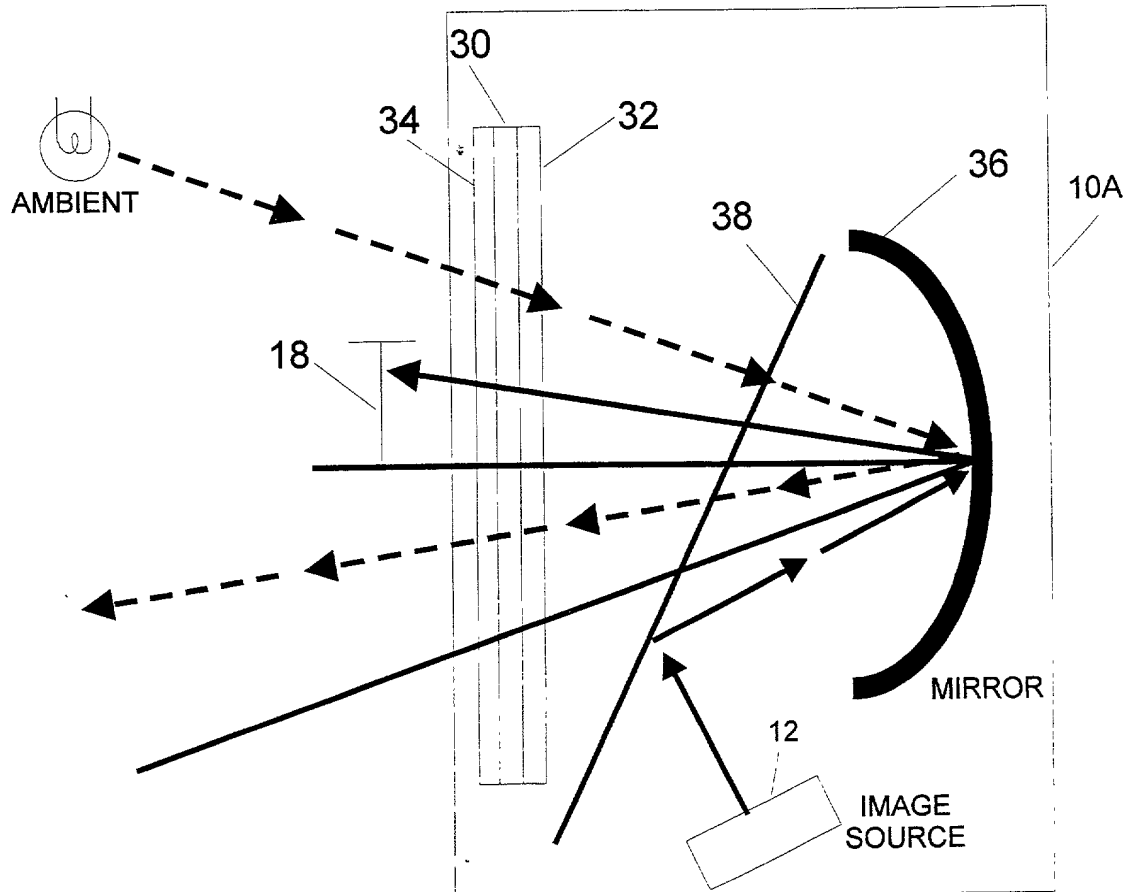


**FIGURE 2a**  
**(Prior Art)**

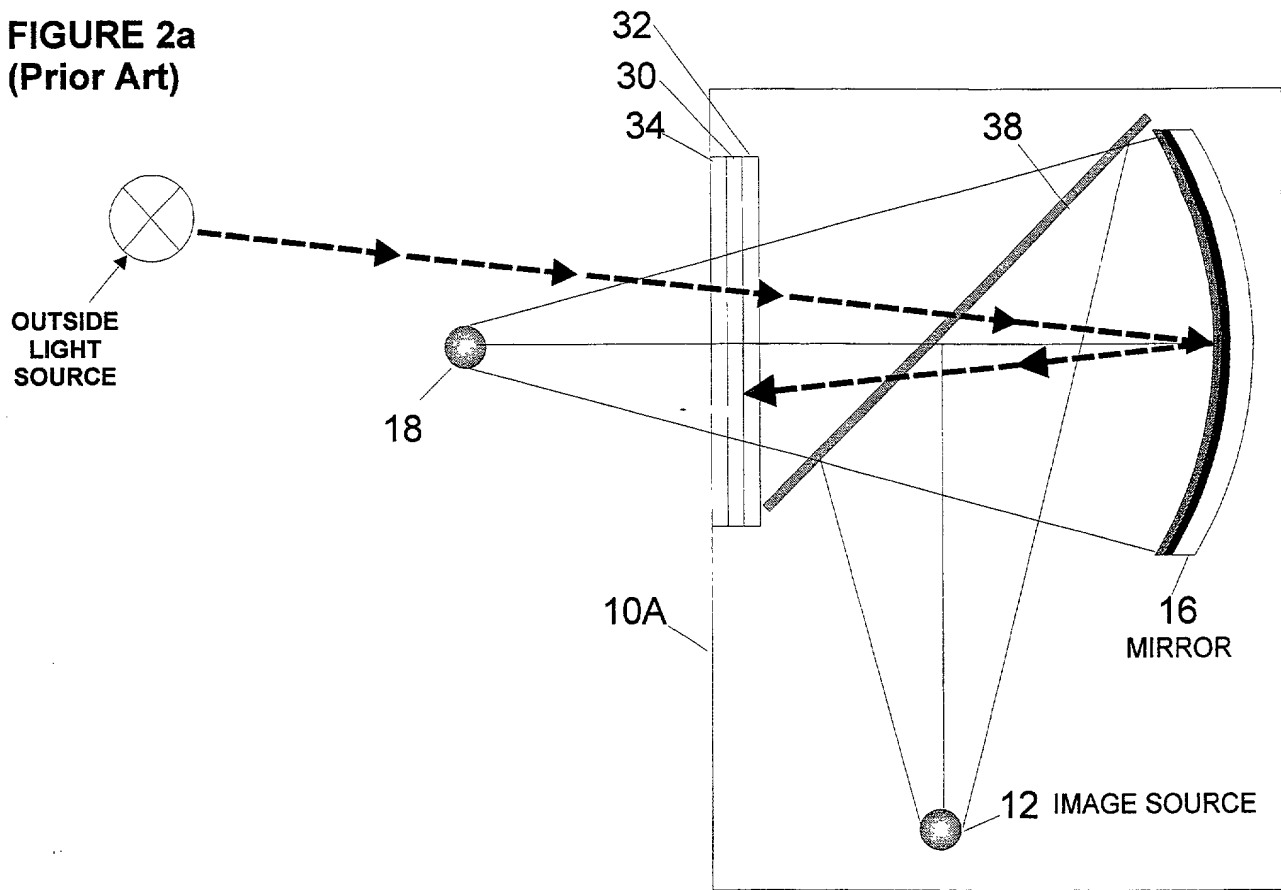


**FIG 3A**  
TRANSMISSION OF IMAGING LIGHT WITHIN IMAGING SYSTEM

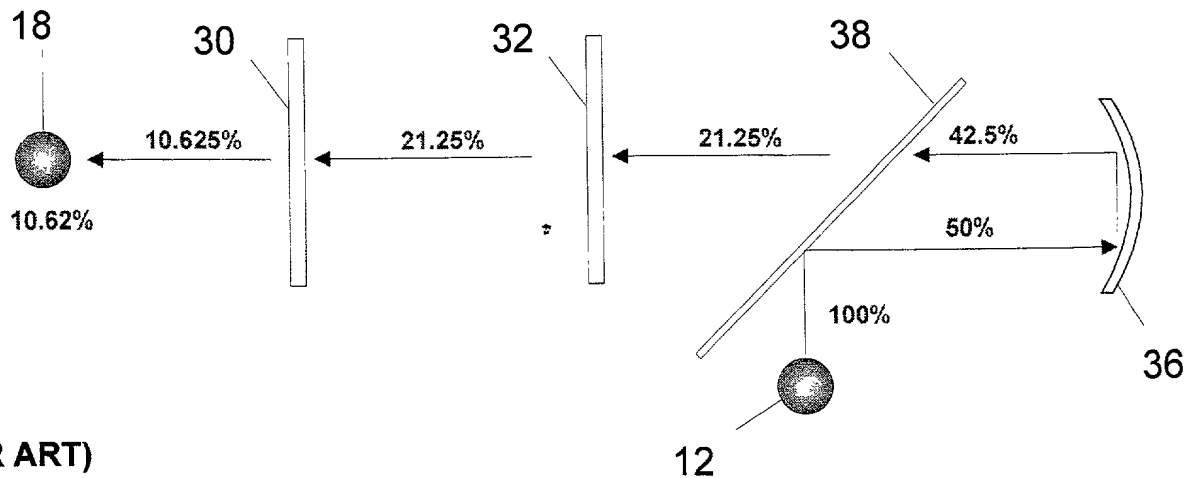


**FIG 3B:**  
TRANSMISSION OF OUTSIDE LIGHT WITHIN THE IMAGING SYSTEM

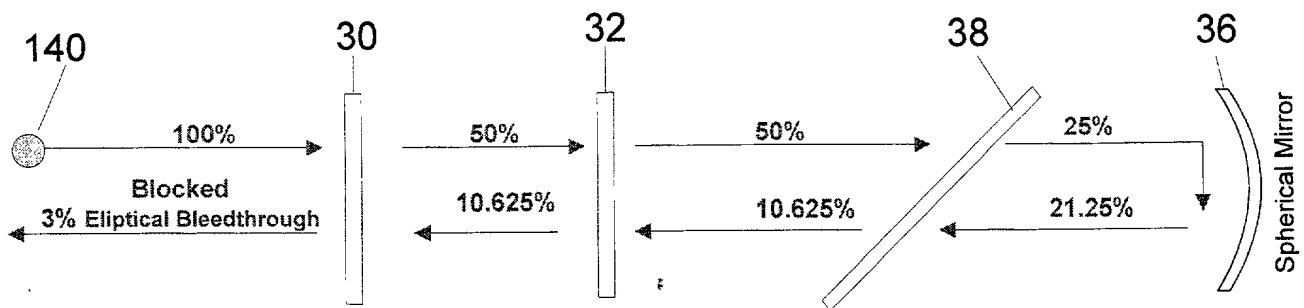


**FIG 3C:**  
POLARIZATION OF OUTSIDE LIGHT FROM WITHIN THE IMAGING SYSTEM

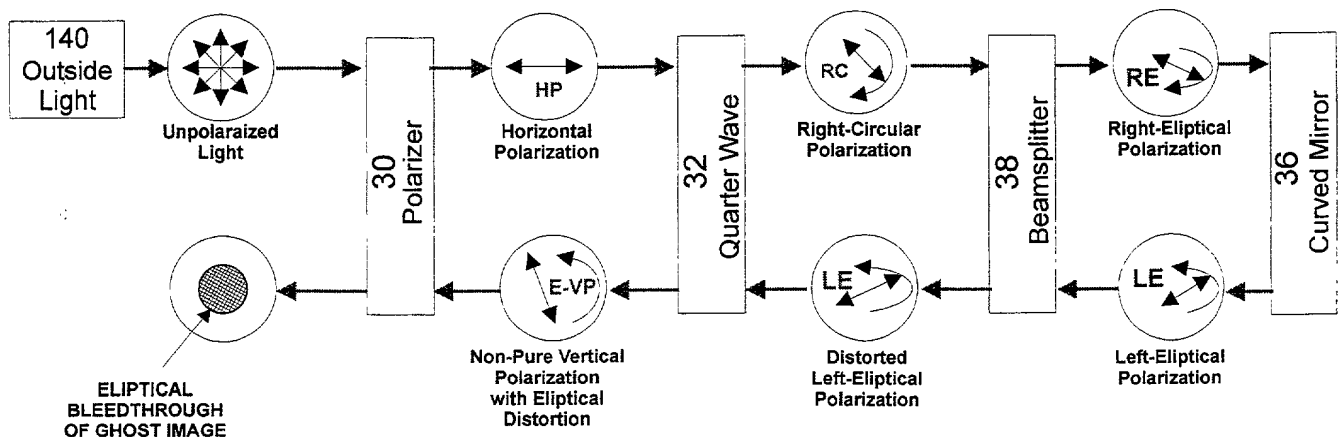


**FIGURE 4**  
System 100

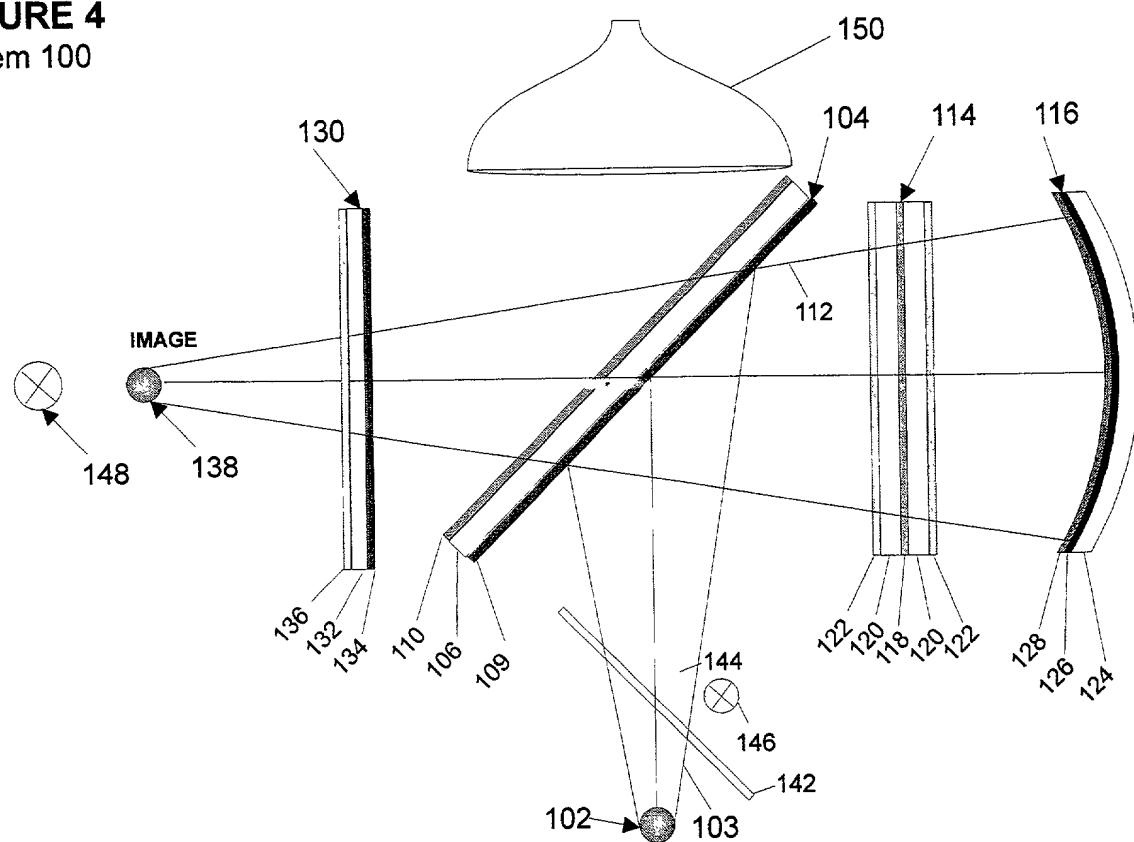


**FIG 5A**  
TRANSMISSION OF IMAGING LIGHT WITHIN IMAGING SYSTEM

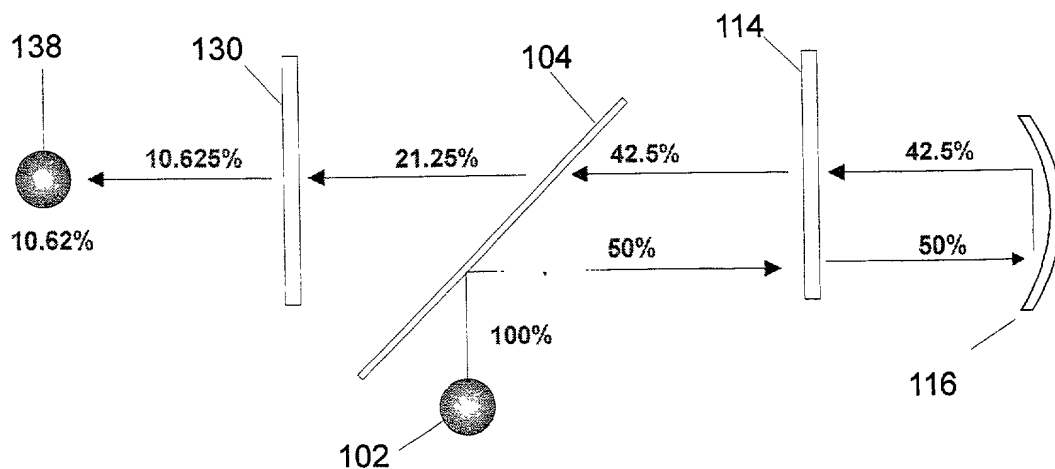

**FIG 5B**  
TRANSMISSION OF OUTSIDE LIGHT WITHIN THE IMAGING SYSTEM

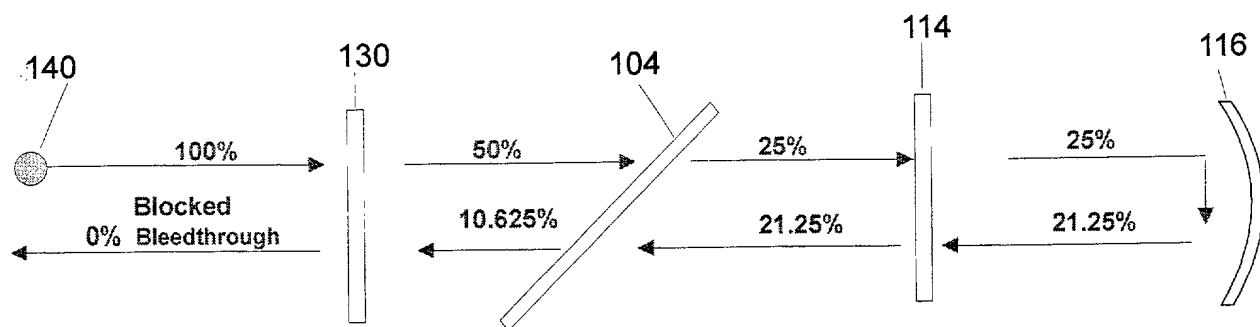


**FIG 5C**  
POLARIZATION OF OUTSIDE LIGHT FROM WITHIN THE IMAGING SYSTEM

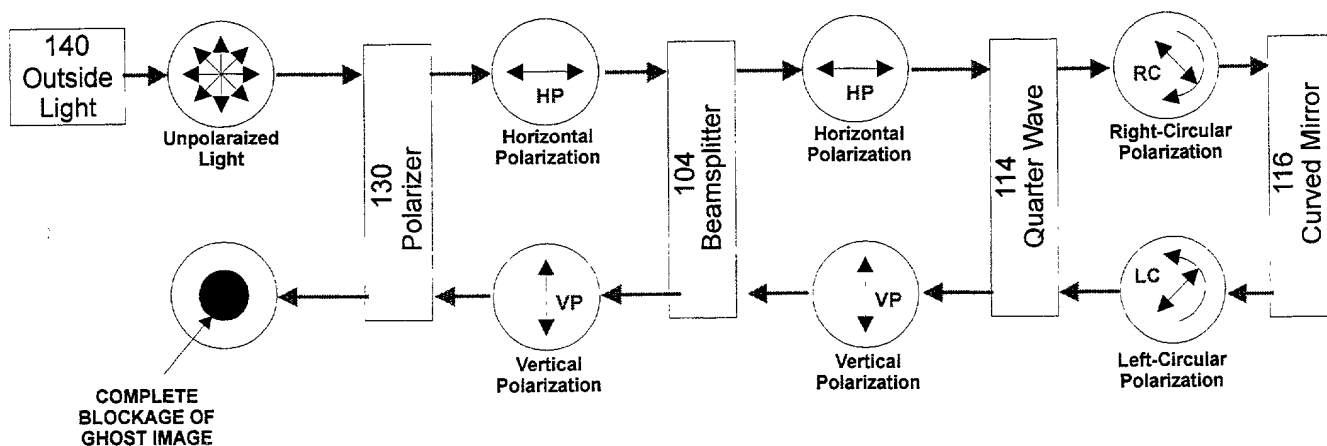


**FIGURE 6**


System 200

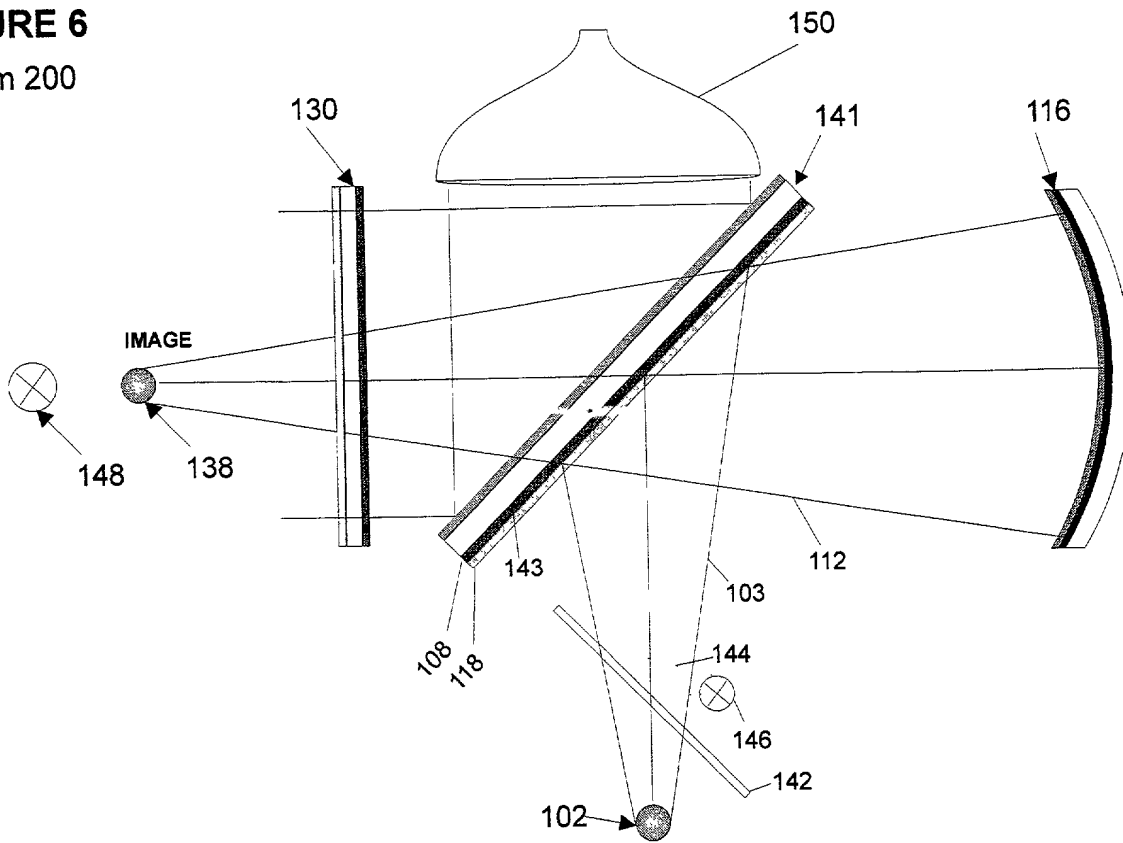


**FIG 7A**  
TRANSMISSION OF IMAGING LIGHT WITHIN IMAGING SYSTEM

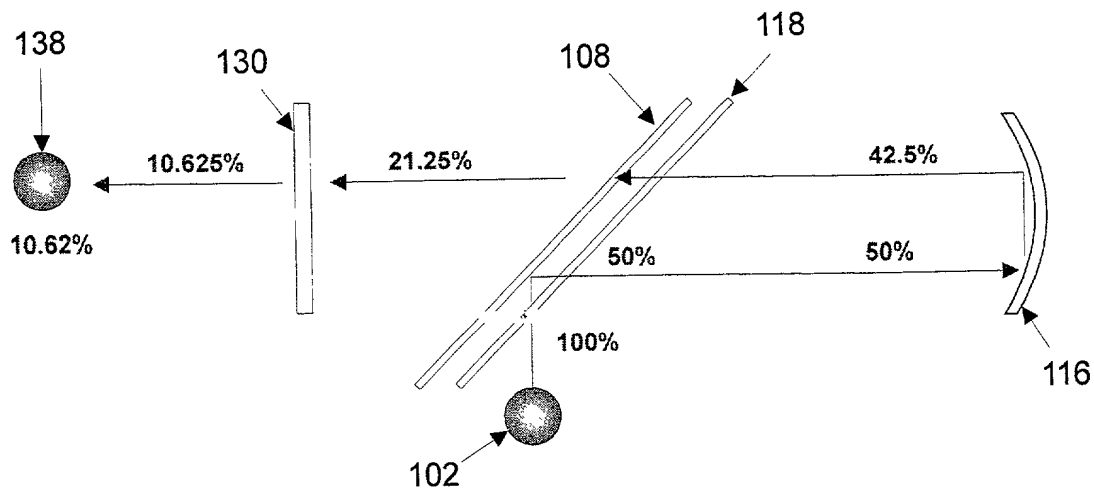


**FIG 7B**  
TRANSMISSION OF OUTSIDE LIGHT WITHIN THE IMAGING SYSTEM

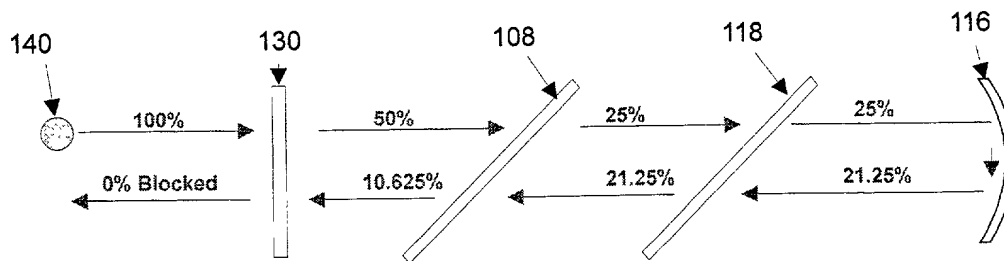

**FIG 7C**  
POLARIZATION OF OUTSIDE LIGHT FROM WITHIN THE IMAGING SYSTEM

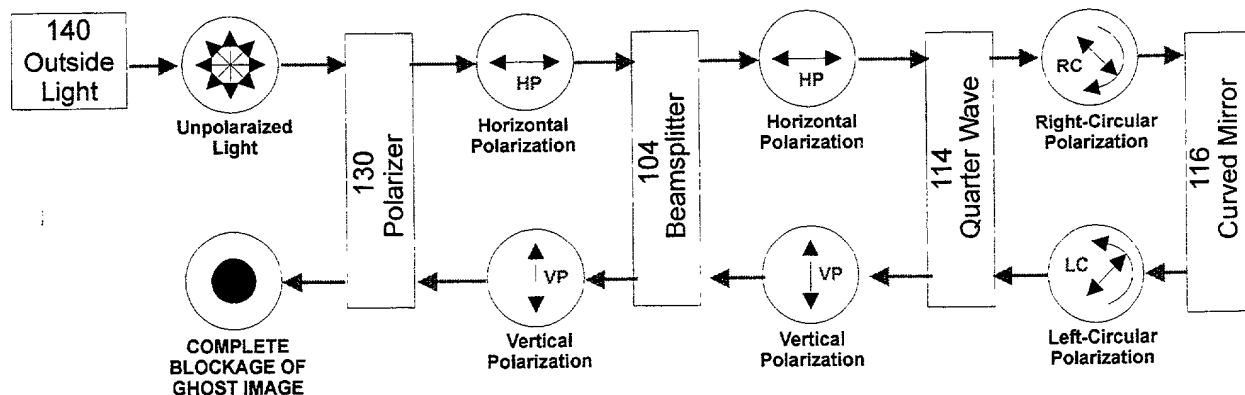


**FIGURE 8**  
System 300

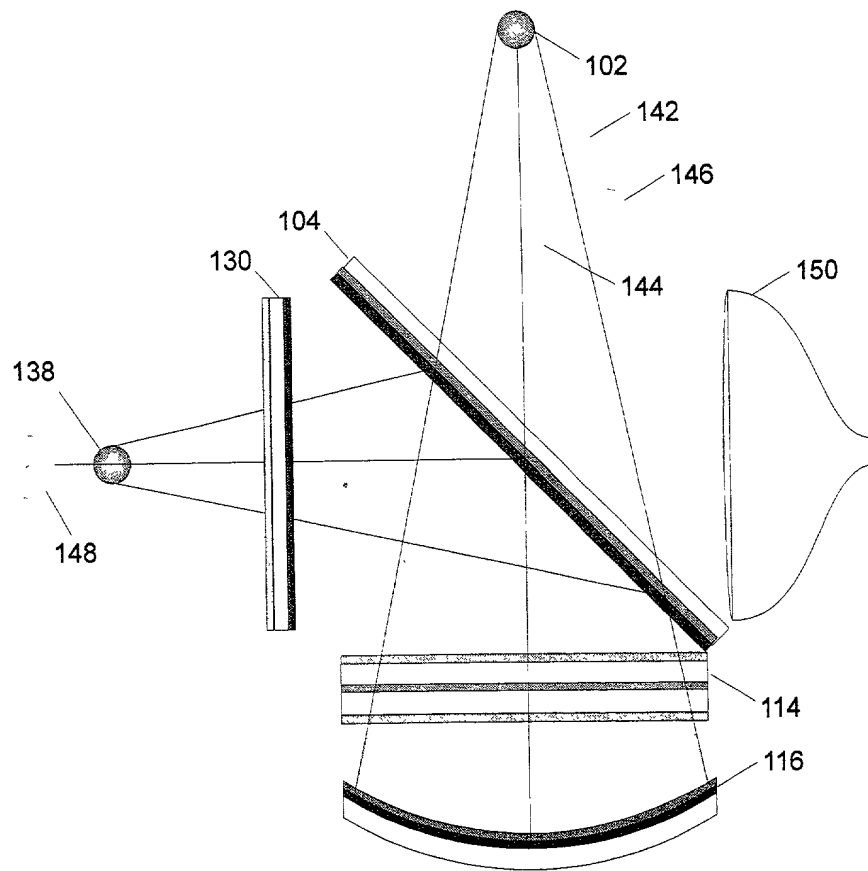





**FIG.9A**  
**TRANSMISSION OF IMAGING LIGHT WITHIN IMAGING SYSTEM**

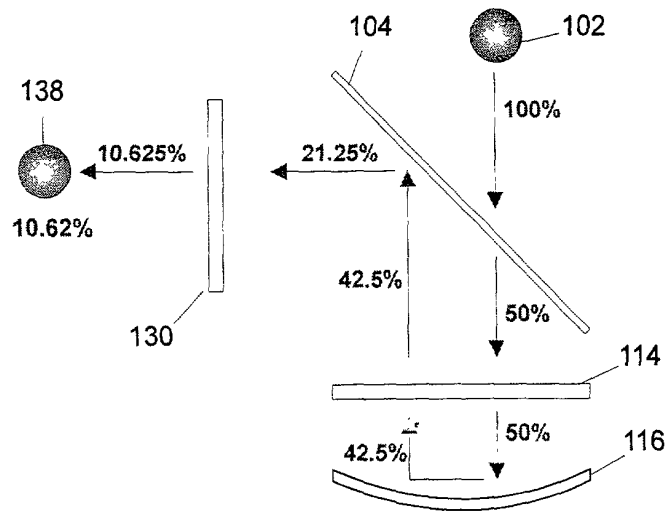


**FIG 9B**  
**TRANSMISSION OF OUTSIDE LIGHT WITHIN THE IMAGING SYSTEM**

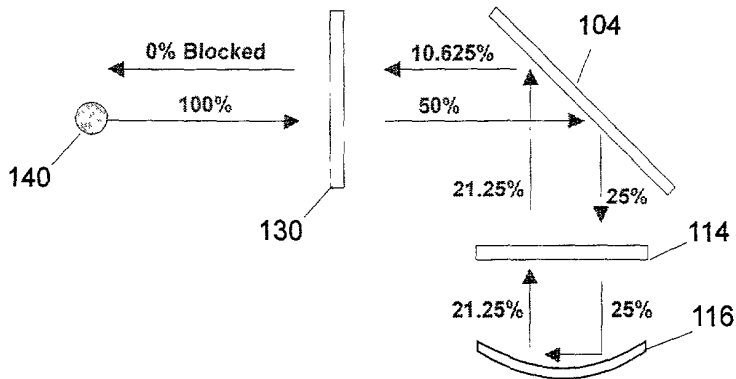

**FIG 9C**  
**POLARIZATION OF OUTSIDE LIGHT FROM WITHIN THE IMAGING SYSTEM**

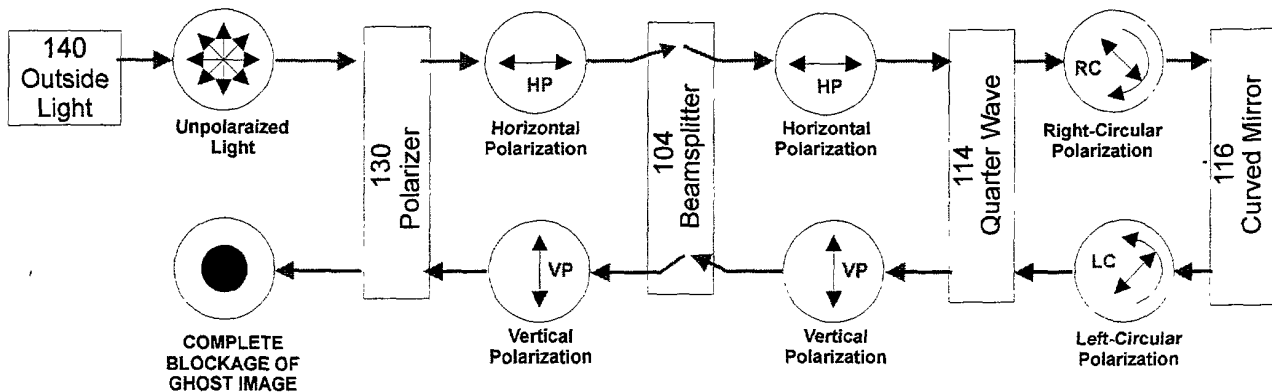


**FIGURE 10**  
System 400

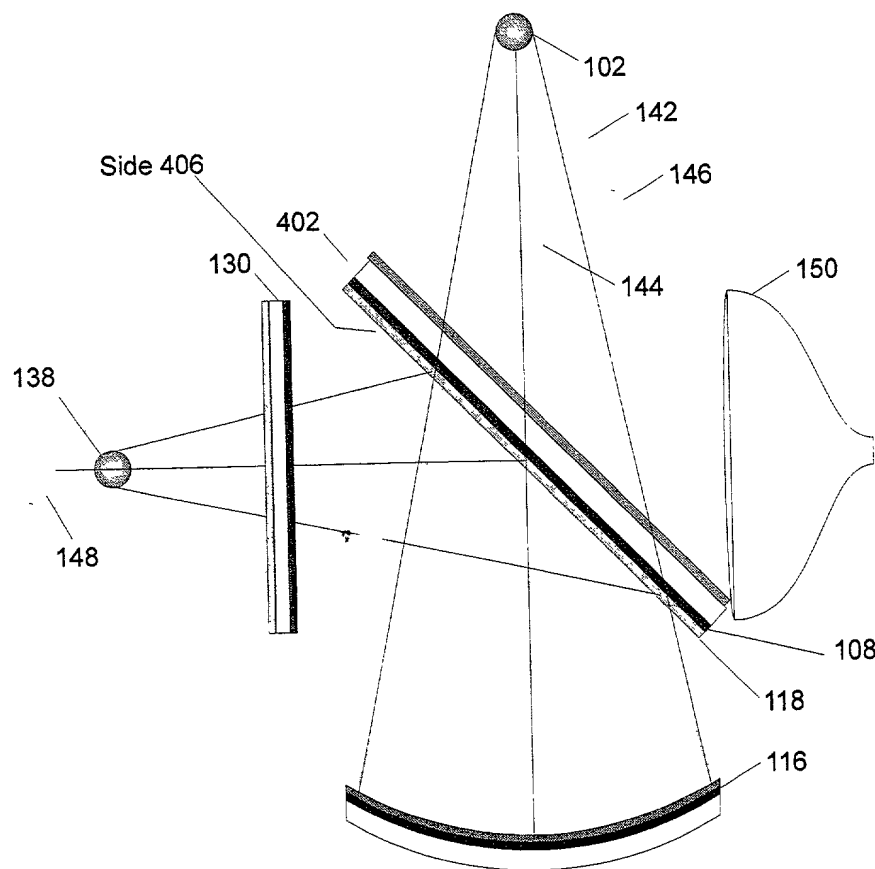

**FIG.11A**

**TRANSMISSION OF IMAGING LIGHT WITHIN IMAGING SYSTEM**

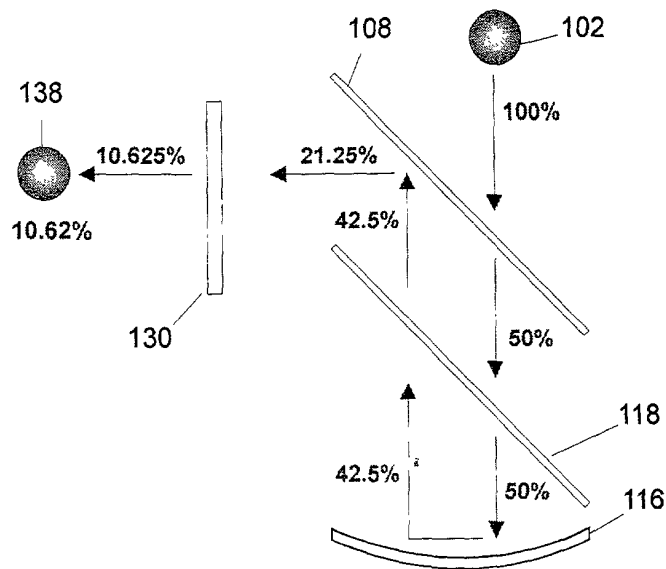

**FIG 11B**

**TRANSMISSION OF OUTSIDE LIGHT WITHIN THE IMAGING SYSTEM**

